

5830 PVC OPENER INSTALLATION INSTRUCTIONS

R-29

1. BEFORE SETTING SKYLIGHT ON CURB.
 - > CHECK FOR VISIBLE DAMAGE.
 - > CHECK CURB FOR OBSTRUCTIONS.
 - > MAKE SURE WORK AREA IS CLEAR.
 - > REMOVE SCREEN FROM SKYLIGHT.
 - > CRANK SKYLIGHT PART WAY OPEN ABOUT 2".
2. SET SKYLIGHT ON CURB, BEING CAREFUL TO CENTER ON OPENING. TRY TO MAINTAIN EQUAL REVEAL ON ALL SIDES.
3. PULL QUICK RELEASE GRENADE PIN ON UPPER FRAME TO ALLOW THE SKYLIGHT TO OPEN 90° TO THE ROOF PLANE.
 - > CAUTION: HINGE IS DESIGNED FOR EASY REMOVAL OF UPPER LITE AND MAY DISENGAGE. TAKE CARE NOT TO LET LITE DROP, OR DAMAGE MAY OCCUR. IF UPPER LITE DISENGAGES, PLACE WHERE SAFE AND PROCEED WITH INSTALLATION.
4. INSTALL #9 x 1 1/4" SCREWS W/SEALING WASHER HEADS PROVIDED, IN HOLES


PRE DRILLED IN SILL FRAME. SEE SILL DETAIL FOR LOCATION OF FASTENERS IN SILL FRAME.

- > DO NOT OVER TIGHTEN.
 - > CURB TAPE IS PROVIDED WITH SKYLIGHT AND THEREFORE NO SEALANT IS REQUIRED BETWEEN SKYLIGHT AND CURB.
5. IF SKYLIGHT HARDWARE NEEDS TO BE REMOVED TO SHEET ROCK AND/OR FINISH SKYLIGHT WELL, REMOVE TWO #10 STAINLESS STEEL SCREWS AT THE UPPER OUTSIDE CORNERS OF THE OPENER HOUSING.
 6. REATTACH UPPER FRAME IF REMOVED. TAKE CARE NOT TO FORCE OR BEND HINGE. INSTALL BY HOLDING UPPER FRAME 90° TO AND CENTERED ON BASE FRAME. ENGAGE HINGE AND SLOWLY LOWER UPPER FRAME ONTO BASE, DO NOT LET DROP. REATTACH GRENADE PIN AND CHAIN OR TEMPORARILY ANCHOR UPPER FRAME TO BASE FRAME IF HARDWARE IS REMOVED TO FINISH SKYLIGHT WELL.
 7. AFTER WELL IS FINISHED REINSTALL OPENER HARDWARE WITH #10 SCREWS. OPEN UPPER FRAME 2" TO 3" AND EXTEND CHAIN TO MEET CLIP AND INSTALL GRENADE PIN.
 8. CYCLE OPEN AND CLOSED A COUPLE OF TIMES TO INSURE OPENER IS WORKING PROPERLY.
 9. INSTALL SCREEN WITH SPRING CLIPS TOWARDS OPENER HARDWARE.

10. ENJOY YOUR NEW ENERGY EFFICIENT CRYSTALITE PVC OPENING SKYLIGHT, "THE CLEAR CHOICE".

ANY QUESTIONS – PLEASE CALL
1-800-666-6065 OR IN EVERETT 259-6000

REQUIRES CURB BE 90° TO ROOF SURFACE



HINGE

ROOF SURFACE

ROOF SURFACE

ALT. WELL WALL


CEILING

RELEASES

AT ABOUT 90°

REMOVABLE HINGE

HEAD

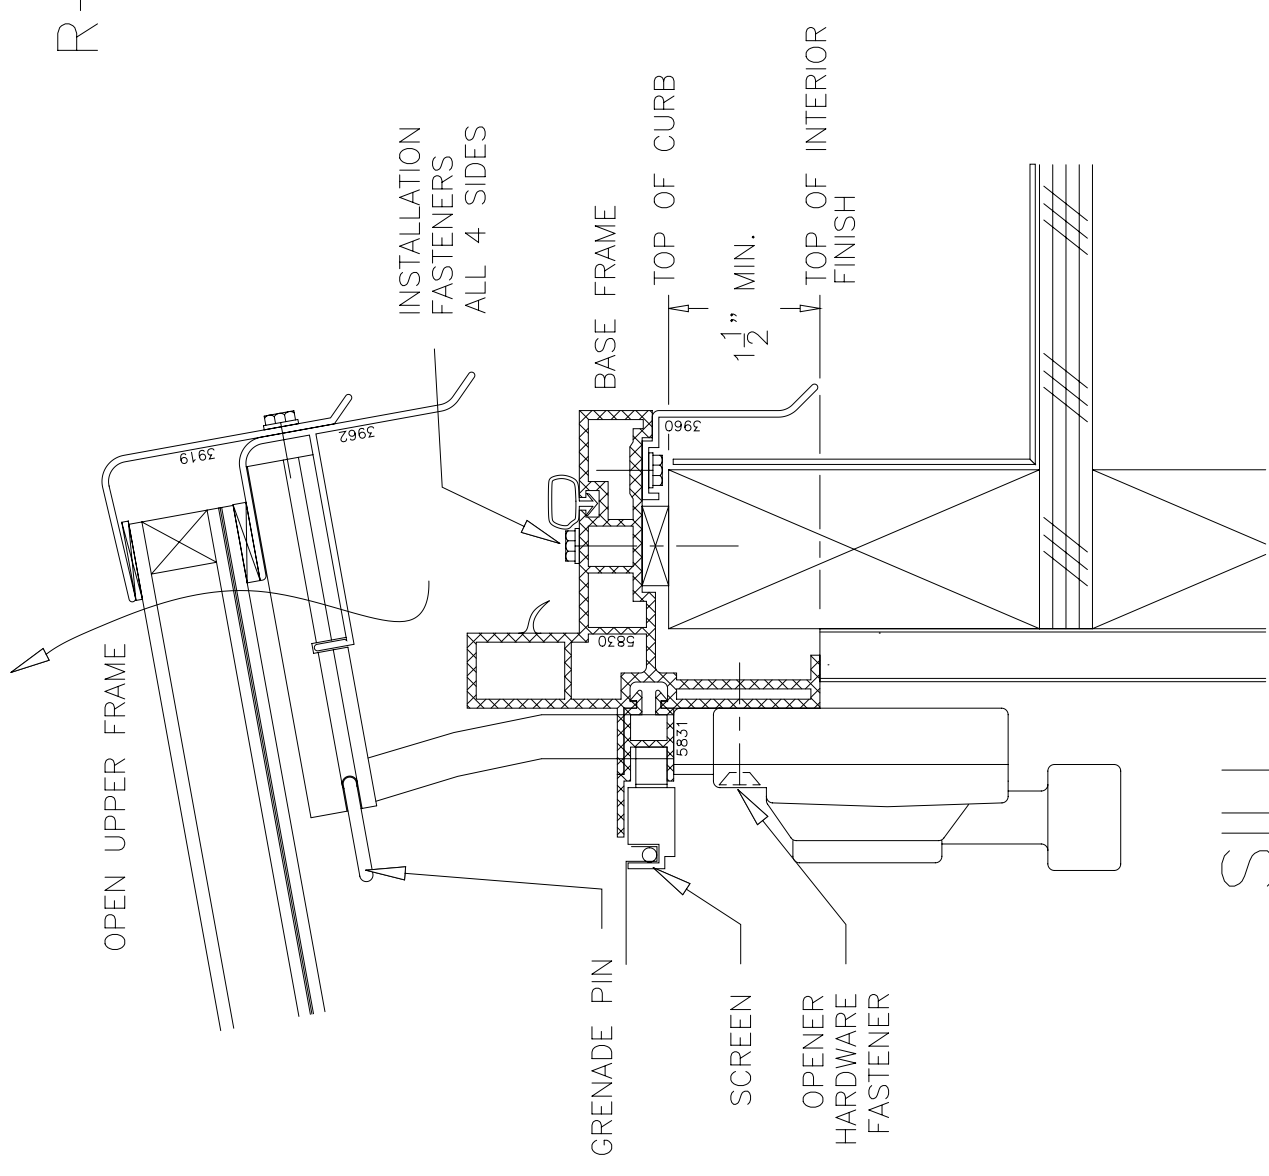

SILL

IMPORTANT

DANGER: UNANCHORED SKYLIGHT CAN AND WILL BLOW OFF ROOF.

1. NEVER PLACE SKYLIGHT ON CURB WITHOUT FASTENING IT DOWN.
2. NEVER REMOVE GRENADE PIN OR OPENER HARDWARE WITHOUT TEMPORARILY ANCHORING UPPER FRAME DOWN.