


Dealer: _____ Date: _____ Quote Only Dealer PO

Attn: _____ Phone: _____ Fax: _____

STANDARD SKYLIGHT ORDER FORM

MODEL	OUTSIDE CURB	SIZE
1838	17.5" x 37.5"	
1850	17.5" x 49.5"	
1874	17.5" x 73.5"	
2626	25.5" x 25.5"	2x2
2634	25.5" x 33.5"	
2638	25.5" x 37.5"	2x3
2650	25.5" x 49.5"	2x4
2662	25.5" x 61.5"	
2674	25.5" x 73.5"	2x6
2698	25.5" x 97.5"	
3434	33.5" x 33.5"	
3438	33.5" x 37.5"	
3450	33.5" x 49.5"	
3474	33.5" x 73.5"	
3838	37.5" x 37.5"	
3850	37.5" x 49.5"	
3862	37.5" x 61.5"	
3874	37.5" x 73.5"	
3898	37.5" x 97.5"	
5050	49.5" x 49.5"	4x4
5062	49.5" x 61.5"	
5074	49.5" x 73.5"	

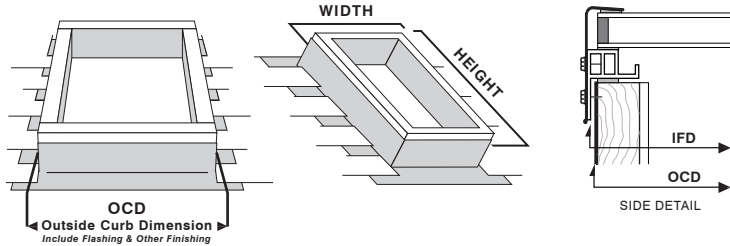

Crystalite will add 1/2" to outside curb dimensions to determine the Inside Frame Dimension (IFD) which allows for 1/4" clearance all around.

Indicate Sizes by Model Number OR Outside Curb Dimension

QTY	Model Number	OCD Outside Curb Dimension		Dealer Cost
		width (in.)	height (in.)	
1				
2				
3				
4				
5				

FIXED FRAMES


- 5842
- 5843
- 3962
- 3921

FRAME COLOR


- Bronze Ano. (standard)
- Clear Anodized
- _____

Note: Venting Skylight Order Form is available.

CURB TYPE



Typical



Typical *only if* curb built-up to minimum 2/12 pitch required for glass skylights on a flat roof.

90° Curb to Roof Pitch

Plumb Curb Cut To Pitch

ROOF PITCH

Minimum 2/12 pitch required for all glass skylights.

12

INSTALLATION LOCATION

- Residential Commercial

Laminated or Plastic Glazing Required on all commercial installations and some residential depending on height and size.

GLAZING OPTIONS

Single / Monolithic

- Tempered
- Laminated

Color

- Clear Bronze
- White _____

Double Pane - Glass Unit

- Temp / Temp
- Temp / Lam
- Temp / FTL

Color

- Clear / Clear
- Bronze / Clear
- Clear / White (lam)
- _____

Triple Pane - Glass Unit

- Temp / Temp / Temp
- Temp / Temp / Lam
- Temp / FTL

Color

- Clear / Clear
- Bronze / Clear
- _____

Dome / Formed Pyramid

- Double
- Triple

Color

- Clear Bronze
- White _____

LOW-E & ARGON *for glass units only (recommended)

- LoE 366 (standard) LoE 180
- LoE 272 _____

NOTE: Triple Pane Units are provided with LoE 366 + 180 unless otherwise requested.

STEP FLASHING KIT (COMPOSITE & SHINGLE ROOFS ONLY)

Curb Height

- 4" Curb
- 6" Curb

Head Flashing Width

_____ in. *2/12 pitch required*

NOTES



EVERETT
phone: 1-800-666-6065
fax: 425-258-6734

SPOKANE
phone: 1-800-382-5403
fax: 509-921-2137

SALEM
phone: 1-800-664-1257
fax: 503-391-0974