

Dealer: \_\_\_\_\_ Date: \_\_\_\_\_  Estimate Only  
 Dealer PO


Attn: \_\_\_\_\_ Phone: \_\_\_\_\_ Fax: \_\_\_\_\_

# RAILING WORKSHEET

## COLOR


- White     Almond     Green     Bronze  
 Silver Grey     Black     "Standard"     \_\_\_\_\_

## TOP RAIL



- 9000     9001     9039     9036     9023     9002  
 NOT FOR USE ON STAIRS


## CONFIGURATION



TRADITIONAL



Post to Post




Over the Top



Double Top Rail


## CABLE OPTIONS




No Bottom Rail  
No Cable Spreader



No Bottom Rail  
With Cable Spreader  
(deck mount only)



Bottom Rail  
No Cable Spreader



Bottom Rail  
With Cable Spreader

## INFILL AREAS



- Flats:**  1/4" Glass     Picket     SS Cable  
**Stairs:**  1/4" Glass     Picket     SS Cable  
**Gates:**  1/4" Glass     Picket     SS Cable

## Glass Color: (if applicable)

- Clear     Bronze     Gray     \_\_\_\_\_

Note: Glass ordered after measurement of installed railing.



## MOUNTING - FLAT RUNS



A completed Side Mount Worksheet is REQUIRED for ORDER

- Deck Mount     Side Mount

## MOUNTING - STAIRS / SLOPES



- Width**  
 3"  
 3.5"  
 4"  
 4.5"

- Deck Mount     Side Mount     Stringer Angle \_\_\_\_\_

## FIELD FASTENERS:

- Not By CrystaLite (default)  
 As indicated on PAGE 3

## LOCATION

- Residential  
 Commercial

## HEIGHT

- 36" tall     42" tall  
 \_\_\_\_\_

## MISC ITEMS


Deck Material: \_\_\_\_\_

Field Measure by:  CrystaLite     Other \_\_\_\_\_





Installed by:  CrystaLite     Other \_\_\_\_\_

FOB:  Dealer     Jobsite





## TOP RAIL AND POSTS COMPATIBILITY

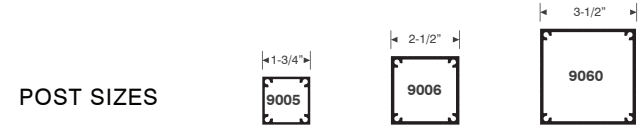





## 9000 Top Rail







## 9001 Top Rail






## 9039 Top Rail




## 9023 Top Rail



## 9002 Top Rail



## 9036 Top Rail



## NOTES


# LAYOUT SKETCH

Provide a sketch of your deck dimensions

Indicate post size & locations with the following symbols: *(optional)*

Indicate existing post locations with ☒


□ 1-3/4" (9005) ■ 2-1/2" (9006) ▣ 3-1/2" (9060) ✕ Cable Spreader

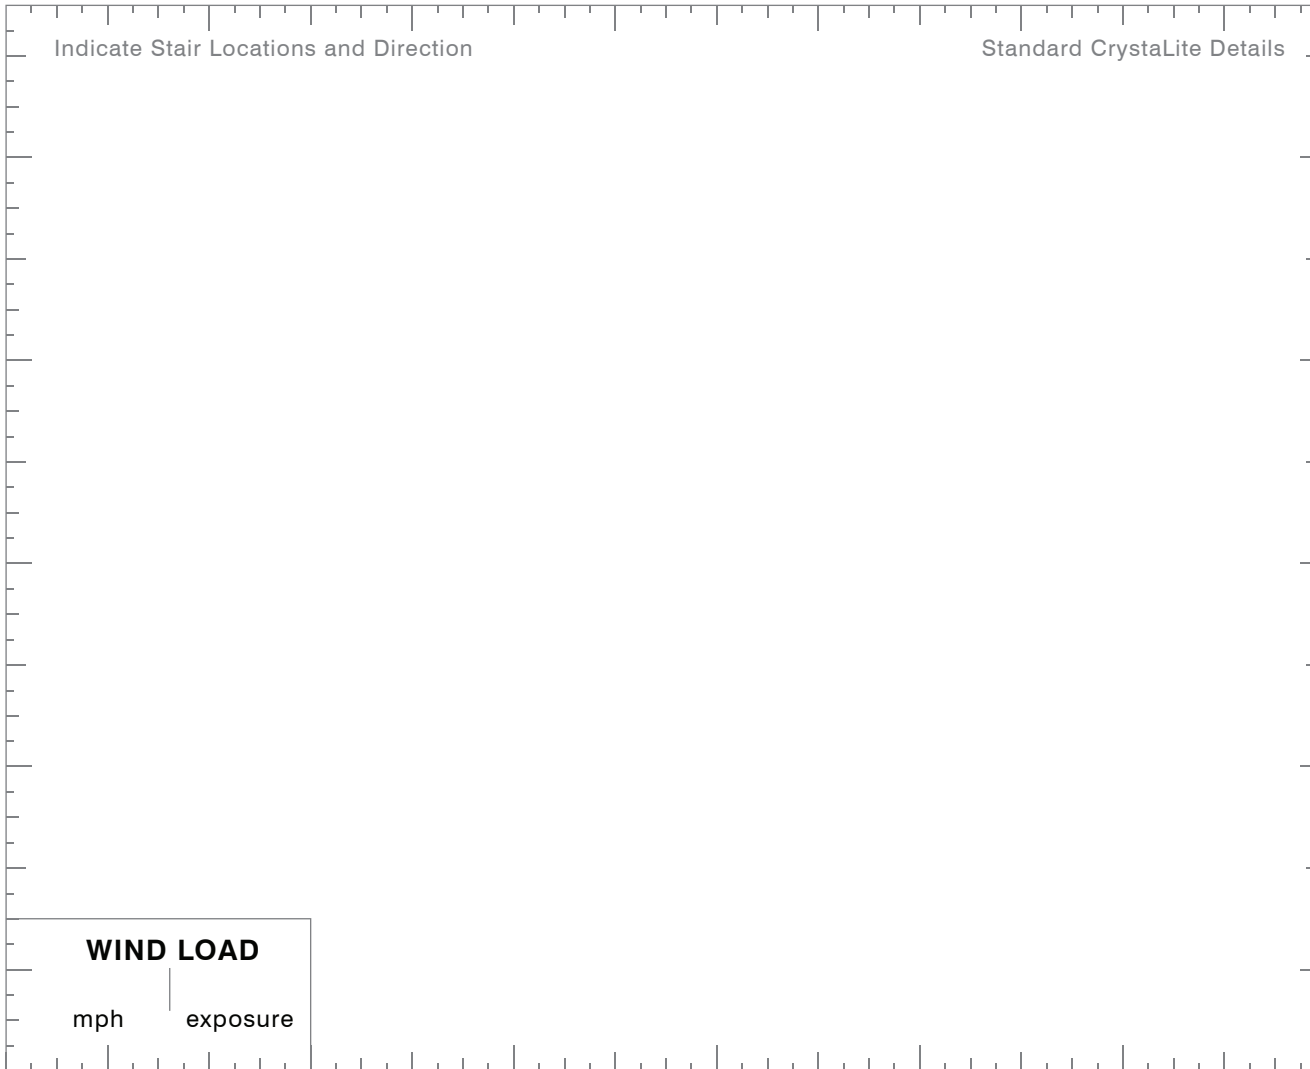

Estimated Dealer Cost  
quote good for 30 days

Total Lineal Feet

## CABLE FASTENER CONFIGURATIONS IF APPLICABLE

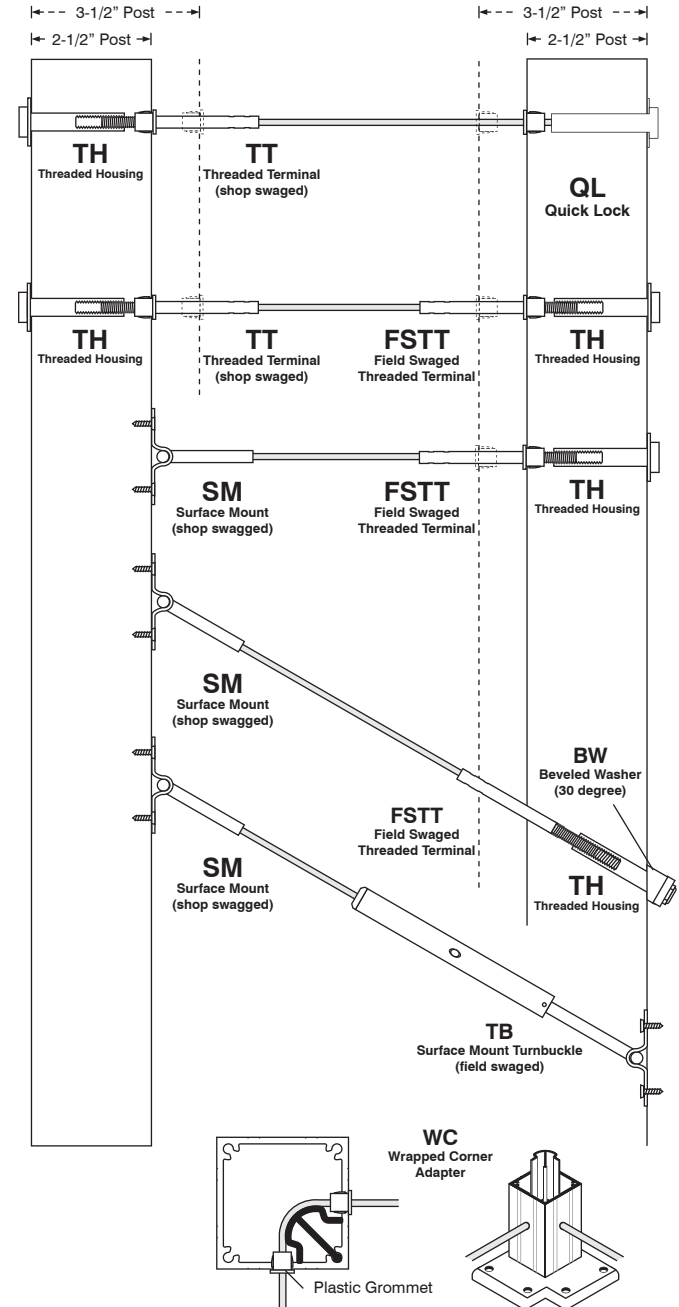

**EVERETT**  
phone: 1-800-666-6065  
fax: 425-258-6734

**SPOKANE**  
phone: 1-800-382-5403  
fax: 509-921-2137



**SALEM**  
phone: 1-800-664-1257  
fax: 503-391-0974

# SIDE MOUNT (FASCIA) WORKSHEET

**This Side Mount Worksheet is REQUIRED for ALL ORDERS when Side Mount is requested**

Please fill out separate sheets if different post dimensions are required for same job.

<b># of Posts</b>	
<b>BASIS OF ENGINEERING</b>	<b>TOP HOLE FROM TOP OF DECK</b>
<b>2 1/2"</b>	
<b>BASIS OF ENGINEERING</b>	<b>BOTTOM HOLE FROM TOP OF DECK</b>
<b>8"</b>	
<b>BASIS OF ENGINEERING</b>	<b>POST LENGTH BELOW FROM TOP OF DECK</b>
<b>9"</b>	
	Recommend 1/2" min. from bottom of Fascia.

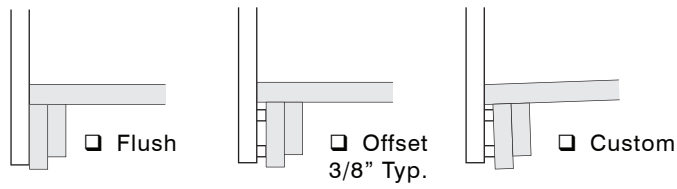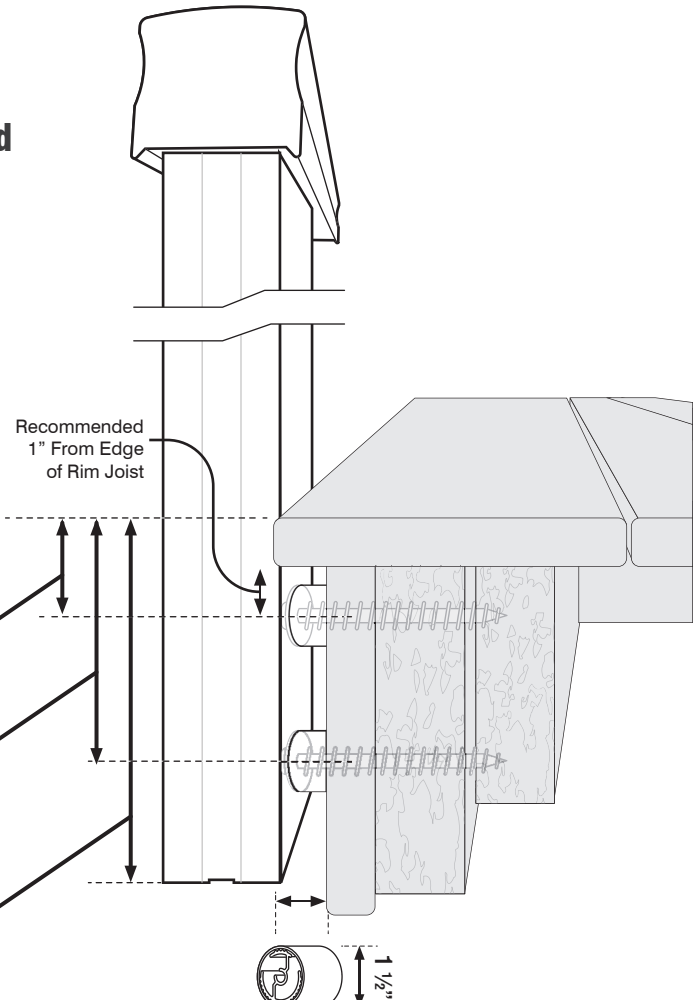

CUSTOM LENGTHS	
Top:	
Bottom:	

# FASTENERS

Crystalite cannot specify field fasteners for your project. Below is a list of available fasteners we can provide and may be used, if the installer verifies that they are sufficient for this specific application.

It is the installer's responsibility to determine mounting fastener sizes and confirm that base plate or side-mount post compression stresses and mounting fastener tension system values are acceptable for the materials to which the rail system is attached.

**FASTENERS NOT BY CRYSTALITE (DEFAULT)**

**DECK MOUNT FASTENERS**

- #14 x 3" PHSMS
- #14 x 4" PHSMS
- 3/8" x \_\_\_\_\_ (additional machining costs)

**SIDE MOUNT FASTENERS**

**LAG INTO BLOCKING**

- 1/4" x 3" SS Lag Screw
- 1/4" x 4" SS Lag Screw
- 1/4" x \_\_ SS Lag Screw
- 3/8" x \_\_\_\_\_

**THROUGH BOLTS W/ NUT & WASHERS**

- 1/4"-20 x 2-1/2" SS
- 1/4"-20 x 3" SS
- 1/4"-20 x 3-1/2" SS
- 1/4"-20 x 4" SS
- 1/4"-20 x \_\_\_\_ SS
- 3/8"-16 x \_\_\_\_\_

**CONCRETE APPLICATIONS**

- 1/4"-20 x 3-1/4" SS Wedge Anchor
- 3/8"-16 x 3-3/4" SS Wedge Anchor

